

1048ilss Quick Installation Guide

Before starting

About this guide

This document provides installation information for the 1048ilss LCD Station Select module for the 1000i Series.


Package contents

- 1048ilss, stand, screws and CAT5E Ethernet cable

Description

The 1048ilss provides 2 x 24 programmable flexible buttons. Up to three modules can be connected to a 1000i Series phone, except the 1010i.

Component names

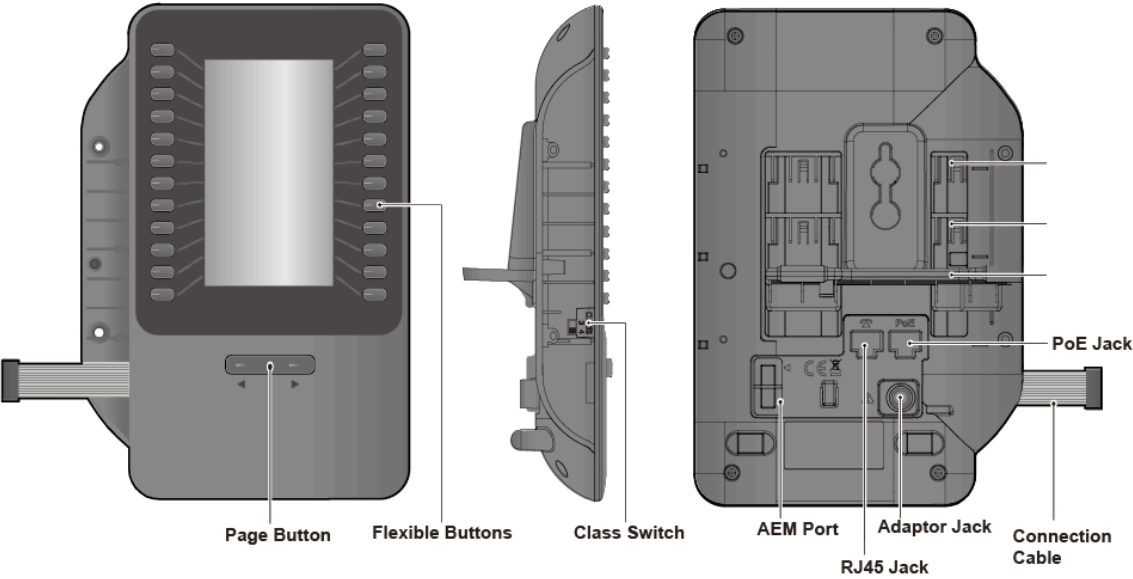

Installation

Place the IP phone and 1048ilss on a level surface near a power outlet, such as a desk.

Connecting the 1048ilss to an IP phone

An iPKTS phone can connect up to three 1048ilss expansion modules.



Caution! Disconnect power or the network cable and ensure the phone is off. Connect only one peripheral to the AEM port: 1048ilss or EHSA.

- 1) Set the power mode and PoE class in advance; see Network and power.
- 2) Disconnect phone power. Remove the handset and stand if convenient.
- 3) Align the 1048ilss with the phone.
- 4) Connect the cable between the 1048ilss and phone.
- 5) Push the module into the phone until fully engaged.
- 6) Insert and tighten the supplied screws.

Attaching the stand


The stand provides a 35°, 41.5° (1080i only) or 50° viewing angle.

Network and power

The 1048ilss can be powered by an approved power adapter (not supplied) or PoE. For PoE, the connected LAN switch must support PoE.

Powered by a power adapter

- 1) Connect the 1048ilss to the phone with the supplied RJ-45 cable.
- 2) Connect the phone PoE port to the LAN switch with an RJ-45 cable (indoor use only).
- 3) Power the phone with its approved adapter and secure the cable in its channel.
- 4) Power the 1048ilss with its approved adapter and secure the cable.

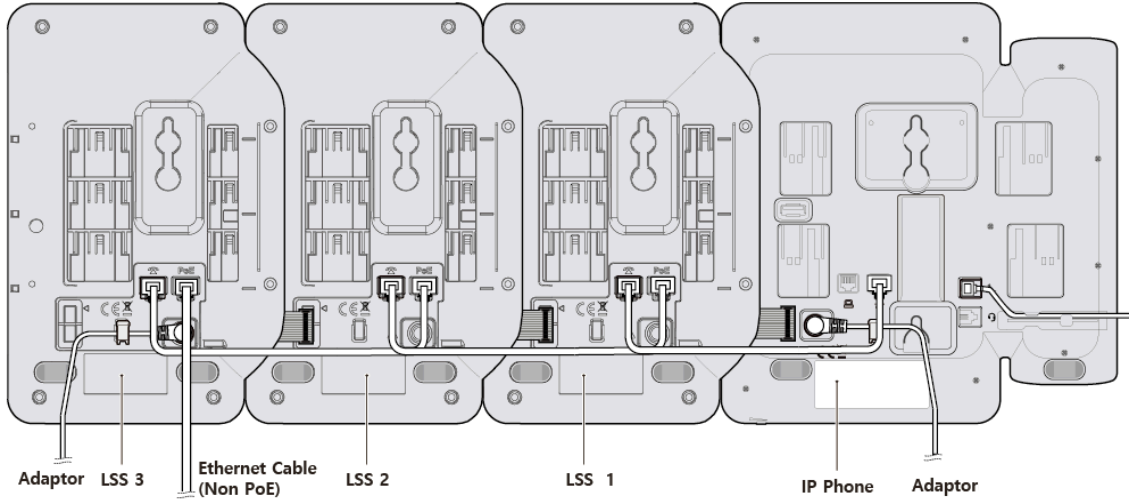


Adapter connection	Model
1 adapter for the 1048ilss	1020i, 1030i, 1040i, 1050i + 1 x 1048ilss
1 adapter for the 1048ilss and 1 for the phone	1020i, 1030i, 1040i, 1050i, 1080i + up to 3 x 1048ilss

Powered by PoE



- 1) Connect the marked RJ-45 jack to the phone LAN port.
- 2) Connect the rear PoE jack to a PoE LAN switch (indoor use only).

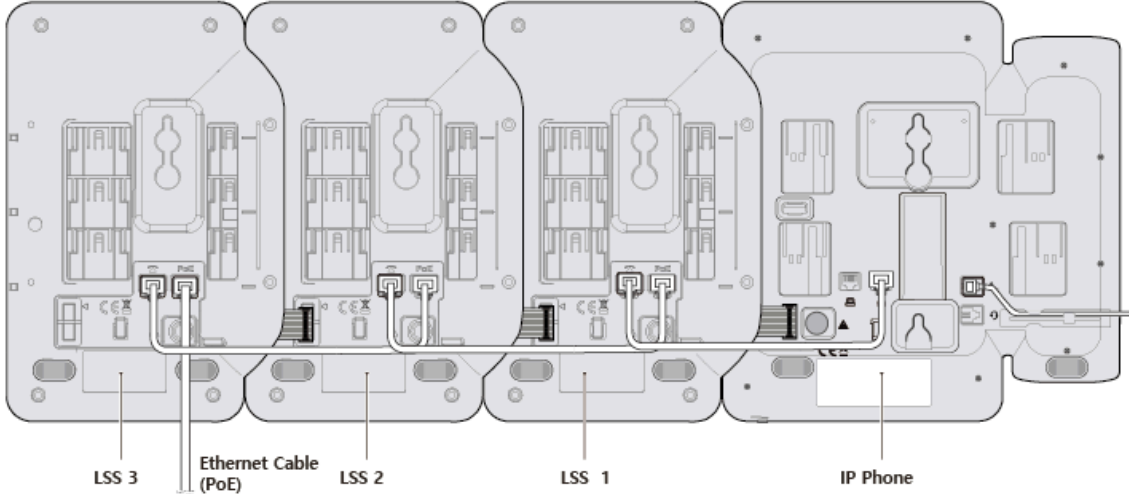

Class	Switch	Power (W)	Model
3	3	6.49 - 12.95	1020i, 1030i, 1040i, 1050i + up to 2 x 1048ilss * 1080i cannot connect to the 1048ilss.
4	4	12.95 - 25.5	1020i, 1030i, 1040i, 1050i + up to 3 x 1048ilss 1080i + up to 2 x 1048ilss

This document may be revised without notice as design and manufacturing evolve. Inspur accepts no responsibility for errors or damage arising from use of this document.

<https://www.inextuc.com/>
For more information, contact Shandong Inspur Communication Equipment Co., Ltd.

